


MULTIUSE TRAIL



1. STANDARD HEIGHT TO THE STREET LIGHT HEAD SHALL BE 14 FEET (TYP).
2. STREET LIGHTS SHALL BE PELCO POST TOP LUMINAIRE POLES WITH BRISTOL SERIES, DARK SKY LED LUMINAIRES, HOLOPHANE WASHINGTON UTILITY LED LUMINAIRE WITH FLUTED POSTS AND HAMILTON BASES, OR STAFF APPROVED EQUAL, SPACED A MAXIMUM OF 200 FEET AND AT INTERSECTIONS. POLES AND LUMINAIRES SHALL BE POWDER COATED BRONZE FEDERAL STANDARD COLOR 20062. DIRECT BURIAL POLES NOT ALLOWED. SEE WEBSITE FOR DETAILED SPECIFICATIONS.
3. SEE SHEET 6 OF THE TYPICAL STREET SECTIONS FOR TREE SPACING.
4. MULTI-USE TRAILS SHALL MATCH SIDEWALK DETAILS OTHER THAN AS CALLED OUT HEREIN.
5. CONTRACTION JOINTS SHALL BE PLACED EVERY 10'. THESE JOINTS SHALL BE SAW-CUT, TOOLED JOINTS WILL NOT BE ALLOWED.
6. EXPANSION JOINTS SHALL BE PLACED EVERY 100'.
7. CENTERSTRIPE SHALL BE SINGLE YELLOW SOLID OR DASHED PAINT (NOT THERMOPLASTIC).
8. CONCRETE SHALL BE THICKENED TO 6" IN ALL DRIVEWAYS.

20 MPH
20' ROW

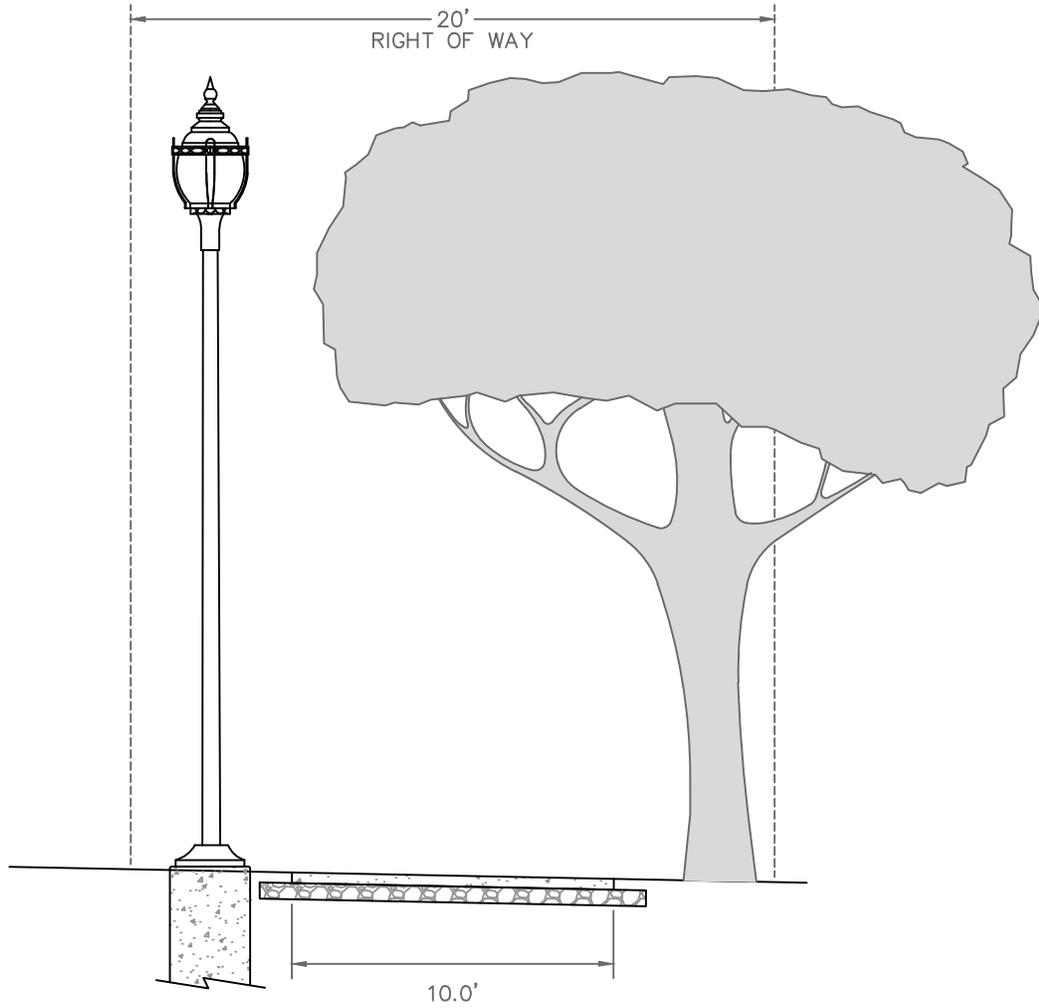

CITY OF ROGERS
301 WEST CHESTNUT STREET
ROGERS, ARKANSAS 72756
(479) 621-1186

TYPICAL STREET SECTIONS

5 OF 6

NOT TO SCALE

OCTOBER 12, 2016